



## SkyATA-101

An Analog Telephone Adapter for Skype™



### Main Features

- Connect Skype through your phone, no need of microphone and speaker.
- SLIC (subscriber line interface circuit) interface for analog phone connection.
- Support cordless phone sets include DECT, 2.4GHz, 900 MHz or others.

### PC-VoIP Market Opportunity

- Tethered with headsets !
  - Can't walk away from PC
  - PC dedicated to single user
- Needs further integration into natural phone usage
  - Use existing cordless phones
  - Use existing cell phones
- Free-up the PC for second user



- Support IM messenger software , Can use cordless phone for talk.

### The Appeal of PC-VoIP


- PC-based, easy usage
  - Free calls, Presence
  - Natural extension of IM
- 150M+ Skype users worldwide
  - 9M+ signing-up every day
- 150M+ users for QQ in China alone
- Millions of MSN, AOL, Yahoo and Google users



- **Skype Caller ID** : Support Type 1 FSK Caller ID for Skype all • Our SkyATA-102 program can provide information about caller's Skype account , caller's Skype speed dial number and the calling time.



- When phone rings, answer a Skype call by picking up handset same as a regular phone line.
- Make a Skype call through phone keypad directly or Skype user interface .
- Support Skype speed dial number and SkypeOut™ through phone keypad directly.
- Connect Skype and SkypeIn™ call into PBX or enterprise IVR feasibly.
- Make a SkypeOut call from PBX digital extension set directly.
- Audio : 16 bit PCM
- Auto-configure Skype audio device as SkyATA after SkyATA initializes completely.
- Create a Multi-Calls and switch call between held calls circularly by pressing phone keypad “# “.
- Create a Conference call and join new calls into the Conference sequentially (Only four Skype user) by pressing phone keypad “\*”.

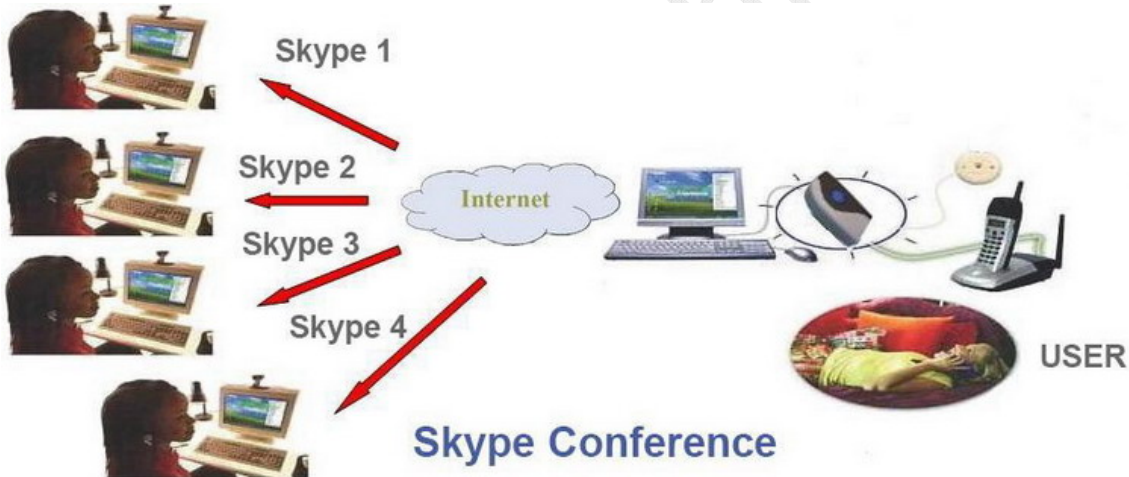

- Support international busy tone generation to connect with PBX feasibly.
- Support 20, 25, 30 and 50Hz ring signal frequency.
- Support 2 REN standard loads.
- Support standard windows USB audio device with unique device ID.
- Support Type I FSK Caller ID for Skype calls with speed dial number for easy call back.

## Minimum System Requirements

- PC running windows XP, 2000(SP4 or later).
- One Computer running at 400 MHz or better, 128 MB RAM with a CD-ROM drive.
- 50MB free disk space on your hardware.
- One free USB port.
- Internet connection (WiFi, ADSL, Cable Modem, 56kbps Modem, ....., etc)

## Specification


- USB 1.1 standard
- Skype 2.0 or 2.5
- One RJ-11 (FXS) for Standard analog or cordless phone set (or Standard PBX analog PSTN interface)
- USB power (No external power needed)
- Dimensions (L x W X H) : 67.4 X 36.2 X 17.8 mm



### LED Indicator:

1. Standby (Slow on/off)
2. Ringing (Fast on/off)
3. Call active (Always on)
4. Error (Always off)

## Connect to an analog telephone

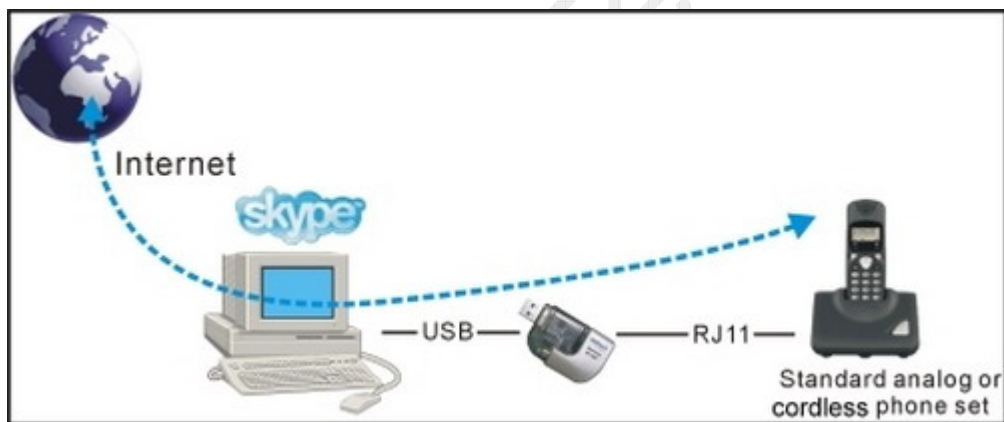

## Connect to a PBX

